



APPROVALS	C-UL <input checked="" type="checkbox"/> UL <input checked="" type="checkbox"/>
CERTIFICATIONS	ROHS <input checked="" type="checkbox"/>
STANDARDS	IEC 60320 C-19 <input checked="" type="checkbox"/> NEMA L6-20P <input checked="" type="checkbox"/>

ALL DIMENSIONS ARE IN MILLIMETERS

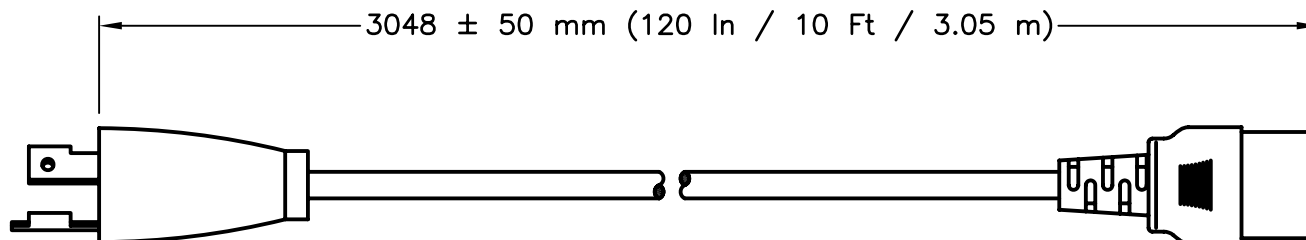

NEMA L6-20P

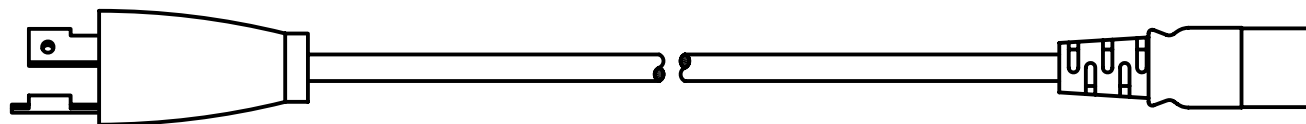

IEC 60320 C-19

SPECIFICATIONS:

- |                      |                                |
|----------------------|--------------------------------|
| 1. OVERALL LENGTH:   | 10 FEET (3.05m)                |
| 2. CONDUCTORS:       | 14awg-3c                       |
| 3. JACKET:           | SJT(OW), BLACK                 |
| 4. PLUG:             | NEMA L6-20P, TWIST-LOCK, BLACK |
| 5. CONNECTOR:        | IEC 60320 C-19, BLACK          |
| 6. RATED:            | 15A 250V (208V)                |
| 7. PUT-UP:           | BULK                           |
| 8. WEIGHT (APPROX.): | 1.2 LBS (0.55 Kg)              |

**WORLD CORD SETS, INC.**

TEL (860)763-2100  
FAX (860)763-1183



www.WorldCordSets.com  
sales@WorldCordSets.com

TITLE  
NEMA L6-20P to C-19 15A 250V (208V) Power Cord

THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF WORLD CORD SETS. NO USE OR REPRODUCTION IN PART OR WHOLE MAY BE MADE WITHOUT WRITTEN PERMISSION FROM WORLD CORD SETS.

SCALE NONE	DATE 09-17-2012	PART NO. L62019-H-120	REV -
---------------	--------------------	--------------------------	----------